



BOYLE MODULAR REFRIGERATED COUNTERS

◆ **gwt** refrigerated counters range offers to the kitchen professional a whole set of functional solutions for their daily tasks, such as reduced space, difficult access, food safety and the need for steady, interruption-free production. All counters offer different options such as wheels, snack, gastronorm or pastry measures, different cabinet heights depending on their usage, etc. A whole set of solutions designed to provide a reliable and versatile product, which is environmentally friendly and great value for money.

Optimum performance in the most demanding kitchens. The front air outlet and the side insulation allow a lot of flexibility in the installation, improving performance, saving energy and avoiding compressor failures.

Features and benefits

HACCP compliance

Temperature and defrost regulated by a digital touch controller IP 65



Temperature monitoring capability (HACCP compliance)



Easy access for maintenance

AISI 304 stainless steel construction, visible exterior and interior

Compact insulated structure

Adjustable feet

Ecodesign concept


Low power consumption

High thermodynamic efficiency compressor

100% natural and 100% recyclable insulation

Climatic class 5 (40
[°C], 40% [RH])

Electrical connection
230 [V~]/50 [Hz]

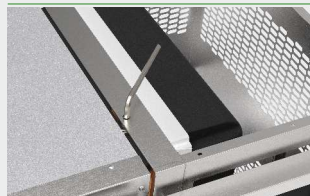

Doors with opening
side changing possi-
bility



Forced evaporation
system

Evaporators treated
with anti-corrosion
polyester epoxy

Fast and easy to as-
semble



Ecological refrigerant
(HC R-290) (ODP=0
and GWP=3)



Automatic and effi-
cient condensate wa-
ter evaporation system

Reduced transporta-
tion costs

BY76LCU - Modular refrigerated counter left
condensing unit 700650

BY76LRU - Modular refrigerated counter left
remote unit 700650

BY7601D - Modular refrigerated counter
door 700650



BY7601R - Modular refrigerated counter
right end panel 700650

BY7601L - Modular refrigerated counter
left end panel 700650


BY760RC - Modular refrigerated counter
door right side closed 700650

BY760LC - Modular refrigerated counter
door left side closed 700650



BY76RCU - Modular refrigerated counter
right condensing unit 700650

BY76RRU - Modular refrigerated counter
right remote unit 700650

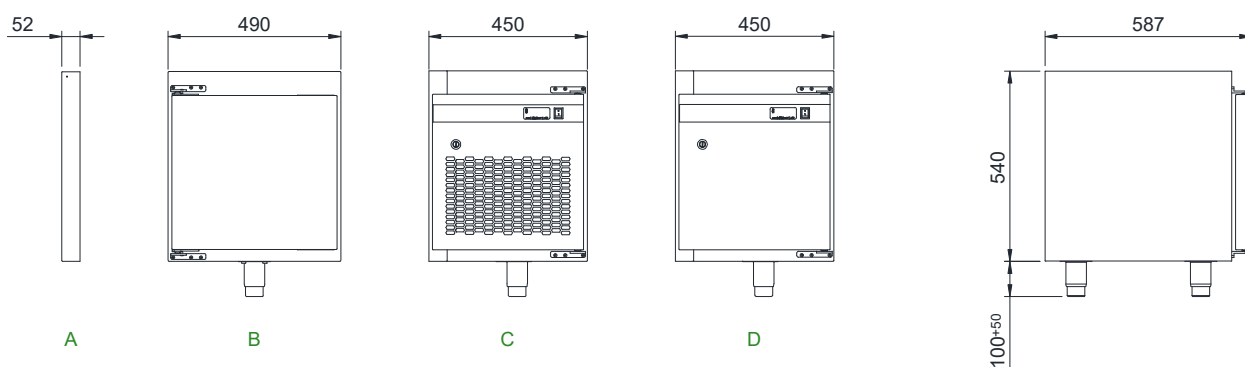

Reference	B	BY7601D	B	BY760LC	C	BY76LCU	D	BY76LRU	A	BY7601L	
Code		BYADO0060000		BYADC0160000		BYACU1060000		BYARU0160000		BYAEP0600000	
Reference	NA		B	BY760RC	C	BY76RCU	D	BY76RRU	A	BY7601R	
Code	NA			BYADC0060000		BYACU0160000		BYARU0060000		BYAEP0610000	
Outer dimension [mm]		490x687x640		490x687x640		450x687x640		450x687x640		52x687x540	
Cardboard packaging dimension [mm]		505x702x555		505x702x555		465x702x555		465x702x555		67x702x555	
Net weight [kg]		24		25		36		19		4	
Weight packing card [kg]		26		27		38		21		5	
Refrigerated useful volume [L]		89		85		NA		NA		NA	
Number of doors		1		1		NA		NA		NA	
Number of shelves/dimension [un]/[mm]		1/530x325		1/530x325		NA		NA		NA	
Type of condensation		NA		NA		Fan cooled		NA		NA	
Refrigerating fluid		NA		NA		R-290		R-134a		NA	
Type of cooling		Fan cooled		Fan cooled		Fan cooled		Fan cooled		NA	
EVCO Digital Controller		NA		NA		EV3292N7		EV3292N7		NA	
Defrosting		Automatic		Automatic		Automatic		Automatic		NA	
Operating Temperature [°C]		0/+10		0/+10		NA		NA		NA	
Max. Pressure LPS / HPS [bar]		NA		NA						NA	
Insulation		EIC		EIC		NA		NA		EIC	
Climate class ¹⁾		5		5		5		5		NA	
Power supply [V~]/([Hz])		NA		NA		230/50		230/50		NA	
Cooling capacity ²⁾ [W]		NA		NA		406		490		NA	
Electric power [W]		NA		NA		179		52		NA	

¹⁾ Test in conformity with EN ISO 23953

²⁾ Evaporating temperature= -10 [°C], Ambient temperature = +32 [°C]

All the dimensions are in [mm].



Rua dos Bombeiros, 731A - Apartado 62
4730-752 Vila Verde - Portugal

Phone: (+351) 924 258 902
E-mail: gwt@gwtechnology.pt
Website: gwtechnology.pt

