



BOYLE MODULAR REFRIGERATED COUNTERS

♦ **gwt** refrigerated counters range offers to the kitchen professional a whole set of functional solutions for their daily tasks, such as reduced space, difficult access, food safety and the need for steady, interruption-free production. All counters offer different options such as wheels, snack, gastronorm or pastry measures, different cabinet heights depending on their usage, etc. A whole set of solutions designed to provide a reliable and versatile product, which is environmentally friendly and great value for money.

Optimum performance in the most demanding kitchens. The front air outlet and the side insulation allow a lot of flexibility in the installation, improving performance, saving energy and avoiding compressor failures.

Features and benefits

HACCP compliance

Temperature and defrost regulated by a digital touch controller IP 65



Temperature monitoring capability (HACCP compliance)



Easy access for maintenance

AISI 304 stainless steel construction, visible exterior and interior

Compact insulated structure

Adjustable feet

Ecodesign concept

Low power consumption

High thermodynamic efficiency compressor

100% natural and 100% recyclable insulation

Climatic class 5 (40
[°C], 40% [RH])

Electrical connection
230 [V~]/50 [Hz]



Doors with opening
side changing possi-
bility



Forced evaporation
system

Evaporators treated
with anti-corrosion
polyester epoxy

Fast and easy to as-
semble



Ecological refrigerant
(HC R-290) (ODP=0
and GWP=3)



Automatic and effi-
cient condensate wa-
ter evaporation system

Reduced transporta-
tion costs

BY66LCU - Modular refrigerated counter left
condensing unit 600650

BY66LRU - Modular refrigerated counter left
remote unit 600650

BY6601D - Modular refrigerated counter
door 600650



BY6601R - Modular refrigerated counter
right end panel 600650

BY6601L - Modular refrigerated counter
left end panel 600650

BY660RC - Modular refrigerated counter
door right side closed 600650


BY660LC - Modular refrigerated counter
door left side closed 600650



BY66RCU - Modular refrigerated counter
right condensing unit 600650

BY66RRU - Modular refrigerated counter
right remote unit 600650

BOYLE 600

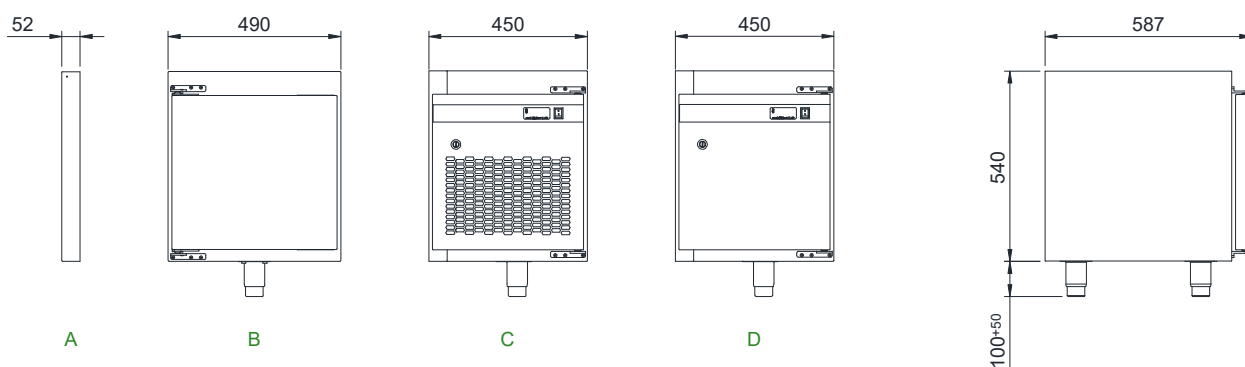

Reference	B	BY6601D	B	BY660LC	C	BY66LCU	D	BY66LRU	A	BY6601L	
Code		BYADO1060000		BYADC1160000		BYACU2060000		BYARU1160000		BYAEP1600000	
Reference	NA		B	BY660RC	C	BY66RCU	D	BY66RRU	A	BY6601R	
Code	NA			BYADC1060000		BYACU1160000		BYARU1060000		BYAEP1610000	
Outer dimension [mm]		490x587x640		490x587x640		450x587x640		450x587x640		52x587x540	
Cardboard packaging dimension [mm]		505x602x555		505x602x555		465x602x555		465x602x555		67x602x555	
Net weight [kg]		22		23		36		19		4	
Weight packing card [kg]		24		25		38		21		5	
Refrigerated useful volume [L]		71		69		NA		NA		NA	
Number of doors		1		1		NA		NA		NA	
Number of shelves/dimension [un]/[mm]		1/430x325		1/430x325		NA		NA		NA	
Type of condensation		NA		NA		Fan cooled		NA		NA	
Refrigerating fluid		NA		NA		R-290		R-134a		NA	
Type of cooling		Fan cooled		Fan cooled		Fan cooled		Fan cooled		NA	
EVCO Digital Controller		NA		NA		EV3292N7		EV3292N7		NA	
Defrosting		Automatic		Automatic		Automatic		Automatic		NA	
Operating Temperature [°C]		0/+10		0/+10		NA		NA		NA	
Max. Pressure LPS / HPS [bar]		NA		NA						NA	
Insulation		EIC		EIC		NA		NA		EIC	
Climate class ¹⁾		5		5		5		5		NA	
Power supply [V~]/([Hz])		NA		NA		230/50		230/50		NA	
Cooling capacity ²⁾ [W]		NA		NA		406		490		NA	
Electric power [W]		NA		NA		179		52		NA	

¹⁾ Test in conformity with EN ISO 23953

²⁾ Evaporating temperature= -10 [°C], Ambient temperature = +32 [°C]

All the dimensions are in [mm].



Rua dos Bombeiros, 731A - Apartado 62
4730-752 Vila Verde - Portugal

Phone: (+351) 924 258 902
E-mail: gwt@gwtechnology.pt
Website: gwtechnology.pt

